

FOR SLIDING CABINET DOORS TO 23KG

For opening widths to	2 panel kit no.
1200mm	D_4
1500mm	D_5
1800mm	D6
Max leaf size	1800 x 900 x 45mm
Max leaf weight	23kg

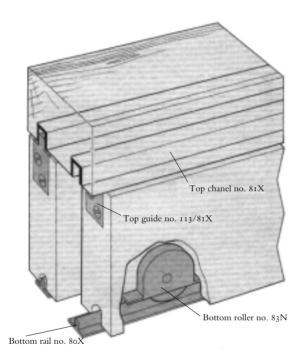



Aluminium top channels with nylon guides and aluminium bottom rails with nylon rollers for quiet, smooth operation of wood-framed glazed or flush, bi-passing cupboard or cabinet doors. Multiple tracks can be fitted.

KITS

Standard kits for two door panels contain 2 guide channels, 4 guides 4 bottom rollers, 2 rails, screws and fixing instructions.

OPTIONAL EXTRAS

Optional extras include: face-fix rollers no. 84N (2 per door) flushpull no. 400; lock no.291 (see pp 52-57 for full product description). Bulk components packs are also available.

INSTALLATION NOTES

(also see drawing)

Top guides mortised into door and guide channels mortised into soffit. Bottom rollers mortised into bottom rail of door (bottom rail must be of sufficient thickness - minimum 20mm). Butt joints on rail or channel are not recommended. Maximum panel weight 23kg, maximum door size 900mm wide by 20-45mm thick.