

StrongBOLT

2100

BS 5 Lever Deadlock



Application:

- For timber doors hinged on the left or right
- Suitable for doors up to 54mm thick
-

Specification:

- Anti-pick, anti-saw and anti-drill security features for resistance against attack
- Chamfered bolt design increases the performance of the lock under side load testing. The chamfer of the bolt also makes drilling attack more difficult
- Radius inner forend for ease of installation
- Deadbolt locked or unlocked by the key from either side
- 20mm deadbolt for secure positive deadlocking and additional resistance against attack
- 2100S can be keyed alike with 2200S
- Can be installed in the many UK mortices without the need for additional carpentry or spoiling the edge of the door
- Anti-pick and keyhole protection prevents forced entry by picking
- Hardened steel pins provide resistance to attack from sawing

- Case Size: 68mm (2.5") or 81mm (3")
- Backset: 45mm or 57mm
- Case: Steel, red powder coat
- Forend: Stainless steel or brass plated
- Striking Plate: Finished to match forend
- Faceplate: Supplied with square faceplate which covers a radius inner forend
- Deadbolt: Zinc with hardened steel rollers
- Latch Bolt: Zinc
- Follower: n/a
- Rebate Kit: 2100REB 13mm (0.5")
- Keying Groups: May be supplied to pass or differ. Supplied with 2 steel nickel plated keys
- Key Blank Number: JKB SBOLT
- Packaging: Individually boxed or Visipacked



Standards:

- Tested to BS3621:2007


2	M	4	1	0	F	7	K	D	0	B
---	---	---	---	---	---	---	---	---	---	---



Finish:

- SS - Satin Stainless Steel
- PB - Polished Brass finish

Technical Design:

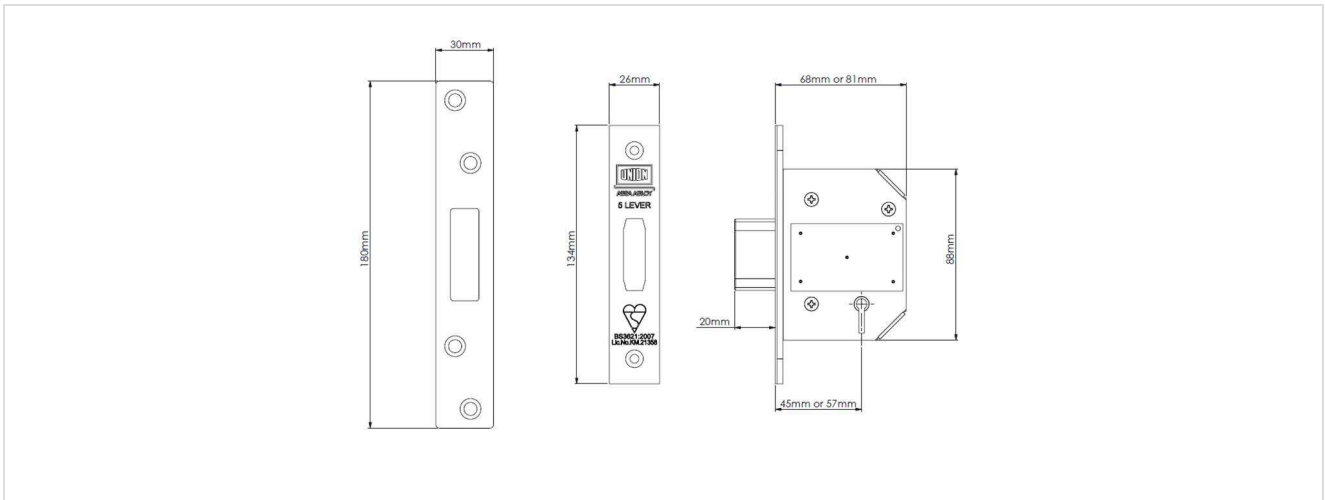

Variants:

Code	Description
J2100S-SC-2.5	S.BOLT BS5 LVR D.LOCK, SS FINISH, 2.5"CASE,
J2100S-SC-3.0	S.BOLT BS5 LVR D.LOCK, SS FINISH, 3"CASE,
J2100S-PL-2.5	S.BOLT BS5 LVR D.LOCK, PB FINISH, 2.5"CASE,
J2100S-PL-3.0	S.BOLT BS5 LVR D.LOCK, PB FINISH, 3"CASE,
Y2100S-SC-2.5	BS 5 LEVER DEADLOCK SQR FOREND - Visi
Y2100S-SC-3.0	BS 5 LEVER DEADLOCK SQR FOREND - Visi
Y2100S-PL-2.5	BS 5 LEVER DEADLOCK SQR FOREND - Visi
Y2100S-PL-3.0	BS 5 LEVER DEADLOCK SQR FOREND - Visi
JP2100S-SC-2.50	BS 5 LEVER DEADLOCK SQR FOREND - To Pass
JP2100S-SC-3.00	BS 5 LEVER DEADLOCK SQR FOREND - To Pass
JP2100S-PL-2.50	BS 5 LEVER DEADLOCK SQR FOREND - To Pass
JP2100S-PL-3.00	BS 5 LEVER DEADLOCK SQR FOREND - To Pass